


Phone: (815) 233-5478 FAX: (815) 233-5479 E-Mail: info@hookerharness.com

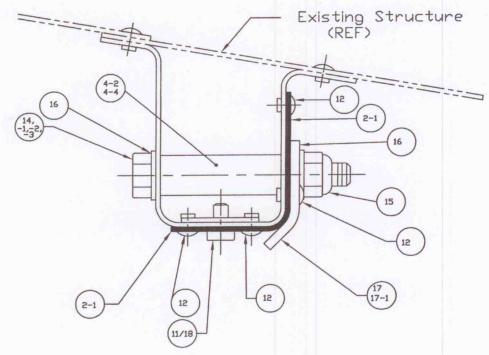

Hooker Harness fixed anchor shoulder harness kit for Cessna Aircraft. Covered Models include: Cessna 120, 140, 140A, 150, 152, 170, 172, 175, 180, 182 (except R 182 and TR182), 185, 205, 206 and 210 (through F-model.

System can be installed without removing the wings. No holes are drilled through the outer skin. Therefore, there is no possibility of water leak and spar corrosion as in other kits. Strong installation. Static tested in excess of 30 G's.

Required tools are:

- 1. Angle head drill motor 3/8"
- 2. Drill bits (#30 & 3/8")
- 3. Short reamer (.510") or Uni-bit
- 4. Cherry rivet gun or a Good pop rivet tool

Kit comes complete with all necessary hardware and brackets. Installation can be accomplished in as little as 30 minutes with the headliner removed. The installation can also be performed while working through the zipper in the headliner (install time will average about 3 hours).

Complete kit comes with new double adjustable seat belt (commercial style buckle with lift-lid release), V or Y-style shoulder harness (detachable from seat belt), hardware kit, installation instructions and STC. Choice of 15 different colors at no additional charge.