


Pacifica I Mini™


Underwing or under fuselage landing or taxi light

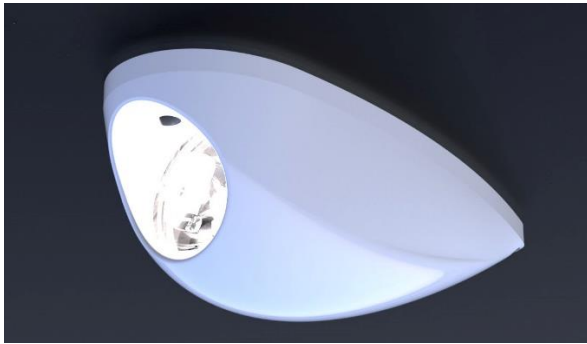

Specification

Dimensions (mm):	152 x 54 x 56.6
Dimensions (inches):	6" x 2.14" x 2.23"
Operating Voltage Range:	9-36 VDC
Input Power:	4 W
Input Current (at 25°C):	0.25 A @28 VDC 0.3 A @14 VDC
Intensity / Beam Angle:	
<i>Lens 3°:</i>	40,000 cd
<i>Lens 10°:</i>	18,000 cd
<i>Lens 28°:</i>	3,500 cd
<i>Lens 37x9° - elliptical:</i>	3,600 cd
Ambient Temperature:	from -40°C to +85°C from -40°F to +185°F
Transient Voltage:	2 seconds +80V
Under-Voltage Lockout:	+9 VDC, not more
Over-Voltage Lockout:	+36 VDC, not less
Color:	White finish Black finish Primer – base color
Weight:	154 g / 5.43 oz
Waterproof, Dust-proof, Vibration-proof:	Yes
Pacifica I Mini – 3° – WHITE	AVE-PIMW-UWA
Pacifica I Mini – 3° – BLACK	AVE-PIMW-UBA
Pacifica I Mini – 3° – PRIMER	AVE-PIMW-UPA
Pacifica I Mini – 10° – WHITE	AVE-PIMW-NWA
Pacifica I Mini – 10° – BLACK	AVE-PIMW-NBA
Pacifica I Mini – 10° – PRIMER	AVE-PIMW-NPA
Pacifica I Mini – 28° – WHITE	AVE-PIMW-MWA
Pacifica I Mini – 28° – BLACK	AVE-PIMW-MBA
Pacifica I Mini – 28° – PRIMER	AVE-PIMW-MPA
Pacifica I Mini – 37x9° – WHITE	AVE-PIMW-EWA
Pacifica I Mini – 37x9° – BLACK	AVE-PIMW-EBA
Pacifica I Mini – 37x9° – PRIMER	AVE-PIMW-EPA

Dimensional Drawing

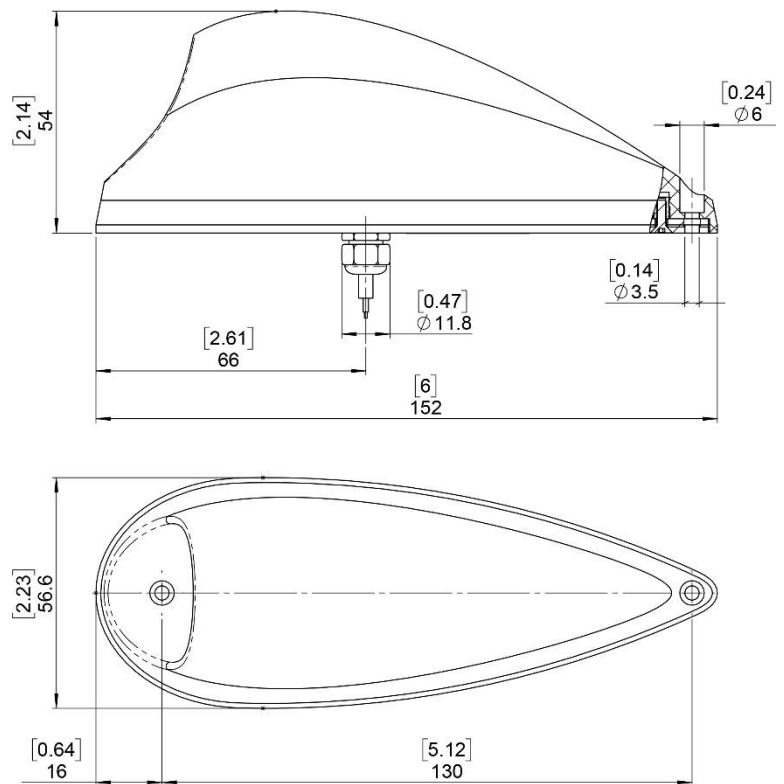

Dimensions in [inches] mm